



Dimmer switch model

Press and hold the circle to control the brightness of the brightness of the light.





Dimmer switch parameter

Rated load:200W

Load types:Incandescent lamp,LED lamp

Super compatible


Comply with 90% kinds of lamp









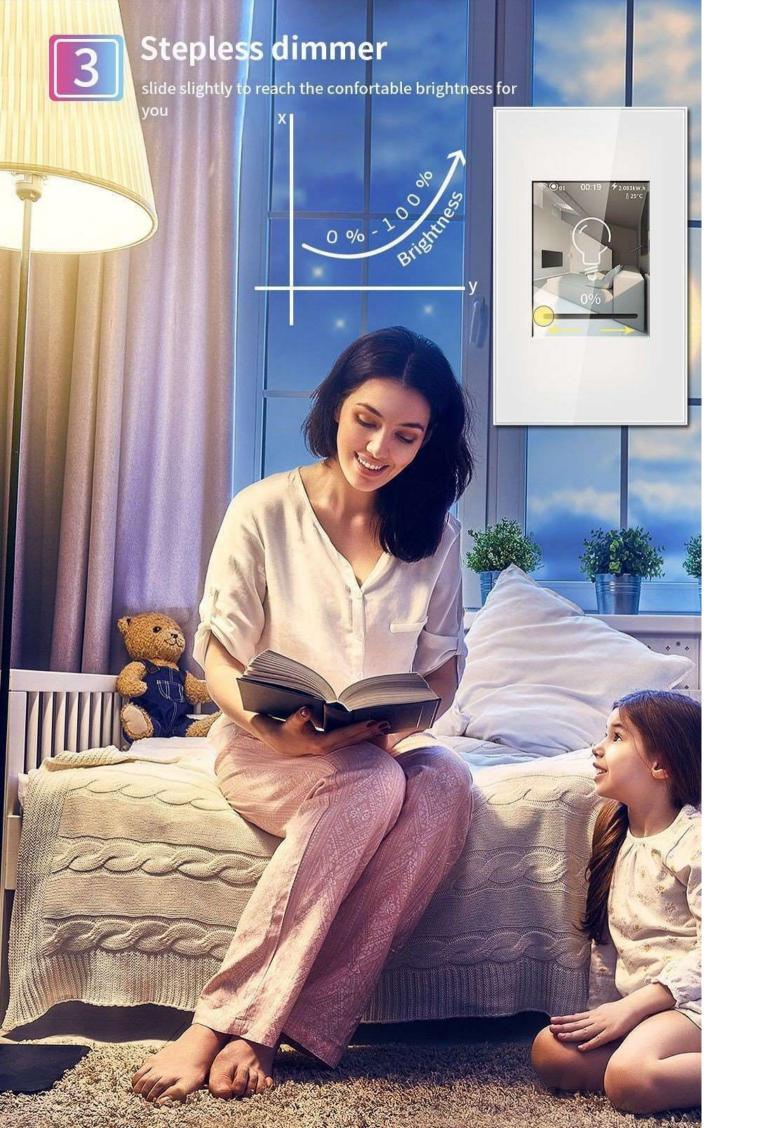



Scan QR code configuration network, more simple and fast

Using the global original scan code configuration, only one key to scan code, complete configuration, simple operation, stable, reliable.








WIFI-MESH Network, more faster and stable.

L8 system switch adopts the latest Google WIFI Mesh technology, WIFI automatic signal forwarding between switches, automatic networking, fast networking, simple operation, no need to arrange multiple AP or WIFI routers, the number of networking switches can reach 255 nodes, the signal can easily cover a variety of large or large office buildings.

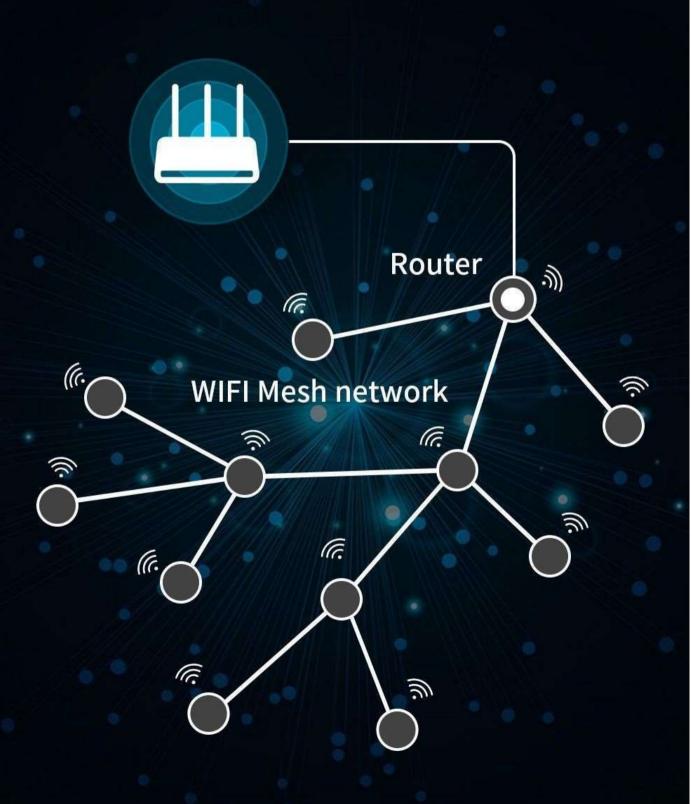



Warm and romantic atmosphere lamp effect, romantic full house


You can set a variety of atmosphere lamp, enjoy different lighting atmosphere in different life scenes





High resolution LCD display

Capacitive touch screens are widely used in the smartphone era, and we have creatively applied this to auroral panels. Compared to traditional press button, the new touch buttons allow younger users to maintain an iPhone-like touch experience on the panel, sensitive and interactive.

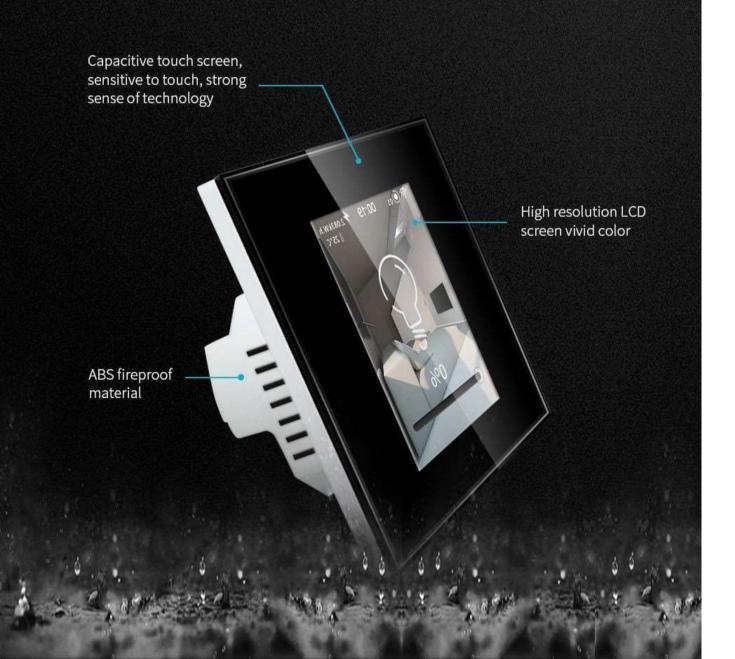



State synchronization

The status synchronize automatically no matter operate on switch or Mobile App





8 group timing

With a simple setup, you can turn on/off the entire house light through the mobile app before sleep, saving the trouble of getting off the bed. Between on/off, life is smart.




7:00 am
Get up mode

10:00pm
Go to sleep mode

9:00am
Leave home mode


6:00pm
Back home mode

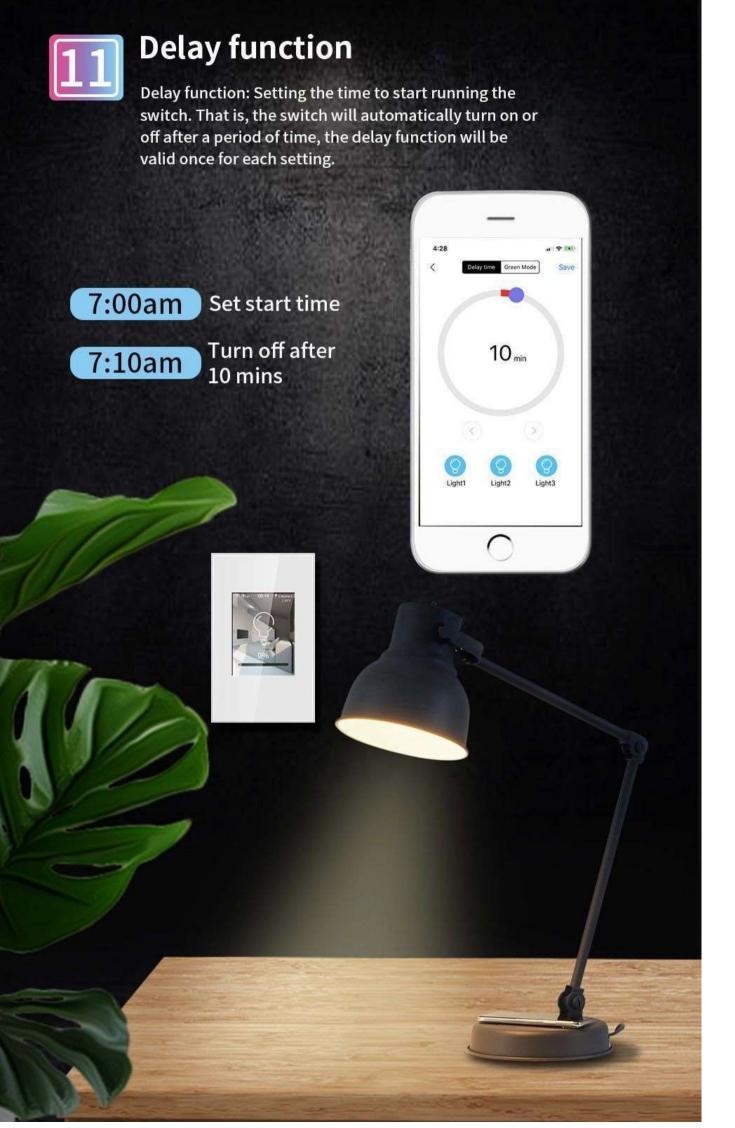



Night mode

Night mode: After night mode is turned on, backlight of switch will automatically turn off, control tone become weaker. Night mode setting can be set for a certain time or all day, normally used for bedroom.

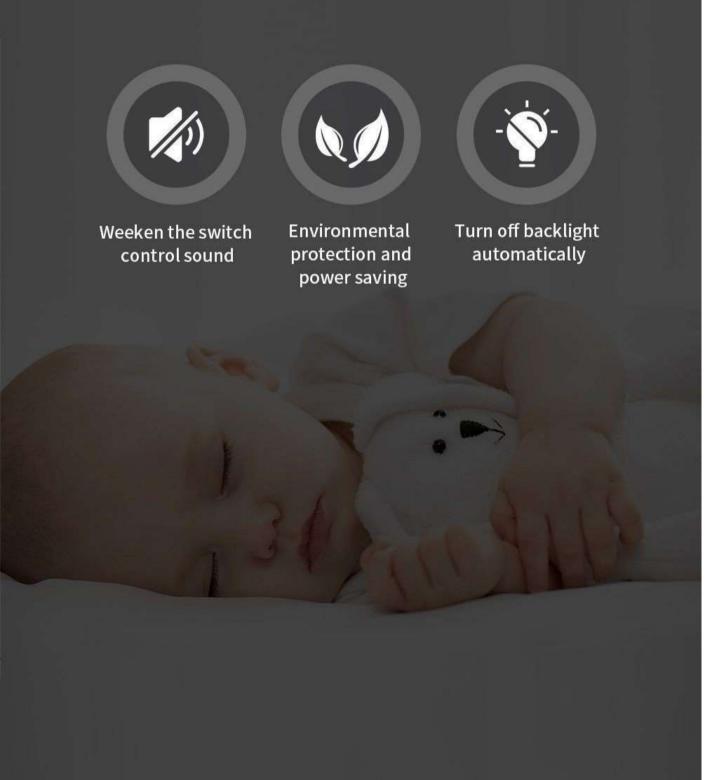

Wide range of application scenarios





Product demo Product parameters

L8-HS (Dimmer switch)







US standard-White



EU standard-Black



US standard-Black

UNIFIED PARAMETERS FOR EACH SWITCH

RATED LOAD: 100W

LOAD TYPES: Incandescent lamp, LED lamp

WEIGHT: 0.3 kg

PRODUCT'S SIZE: 86 mm * 86 mm / 120 mm * 74 mm

PACKING BOX SIZE: 102.6 mm * 141 mm * 51.1 mm

PANEL: Capacitive touch screen

BOTTOM MATERIALS: Flame Retardant PC

RATED VOLTAGE: AC 100-250V 50/60Hz

WIRELESS STANDARD: IEEE 802.11 b/g/n

FREQUENCY RANGE: 2.405GHz~2.480GHz

RECEIVING SENSITIVITY: -97dbm

OPERATING TEMPERATURE: - 40 ° C ~ + 85 ° C.

RELATIVE HUMIDITY: < 95%


package







wiring diagram



L8-HD (Dimmer switch)











GO SMART IDEA SDN BHD



main@gosmartidea.com



https://www.gosmartidea.com





019-6558966